




Elektro-Automatik

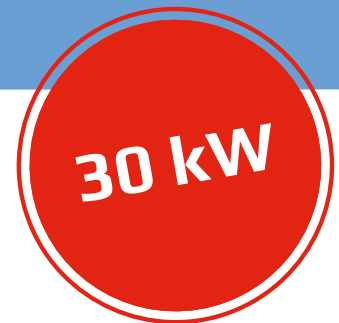


**DATASHEET**

# EA-PS 10000 4U

Programmable  
DC Power Supply

# EA-PS 10000 4U 30 KW

Programmable  
DC power supply

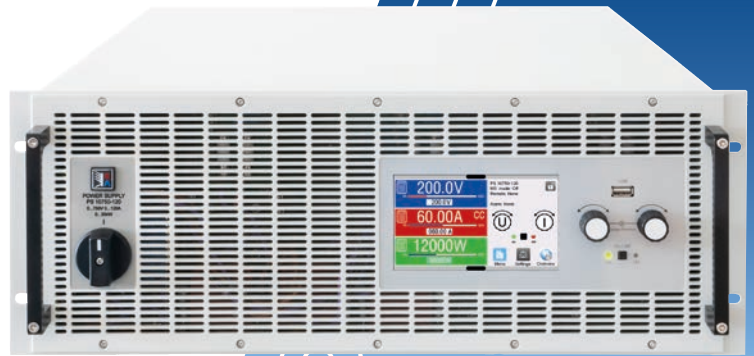

## Features

- Wide range input: 208 V - 480 V,  $\pm 10\%$ , 3ph AC
- Active Power Factor Correction, typical 0.99
- Very high efficiency of up to 96%
- High performance with 30 kW per unit
- Voltages from 0 - 60 V up to 0 - 2000 V
- Currents from 0 - 40 A up to 0 - 1000 A
- Flexible, power regulated DC output stages (autoranging)
- Regulation modes CV, CC, CP, CR with fast crossover
- Digital regulation, high resolution with 16bit ADCs and DACs, selection of voltage regulation speed: Normal, Fast, Slow
- Color 5" TFT display with touch control and intuitive user interface
- Galvanically isolated Share bus for parallel operation of all power classes in the 10000 series
- Master-Slave bus for parallel operation of up to 64 units of all power classes in the 10000 series
- Command languages and drivers: SCPI and ModBus, LabVIEW, IVI

## Built-in interfaces

- USB
- Ethernet
- Analog
- USB Host
- Master-Slave-Bus
- Share-Bus

## Optional interfaces

- CAN
- CANopen
- RS232
- Profibus
- EtherCAT
- Profinet, with one or two ports
- Modbus, with one or two ports
- Ethernet, with one or two ports

## Software

- EA-Power Control

## Options

- Water Cooling in stainless steel

## Technical data

General specifications	
<b>AC input</b>	
Voltage, Phases	Range 1: 208 V, $\pm 10\%$ , 3ph AC (with DC output power derating to 18 kW) Range 2: 380 - 480 V, $\pm 10\%$ , 3ph AC
Frequency	45 - 65 Hz
Power factor	ca. 0.99
Leakage current	<10 mA
Inrush current / Phase current	$\leq 56$ A
Overvoltage category	2
<b>DC output static</b>	
Load regulation CV	$\leq 0.05\%$ FS (0 - 100% load, constant input voltage and constant temperature)
Line regulation CV	$\leq 0.01\%$ FS (208 V - 480 V AC $\pm 10\%$ supply voltage, constant load and constant temperature)
Stability CV	$\leq 0.02\%$ FS (during 8 h of operation, after 30 minutes warm-up, at constant output voltage, load and temperature)
Temperature coefficient CV	$\leq 30$ ppm/ $^{\circ}$ C (after 30 minutes of warm-up)
Compensation (Remote Sense)	$\leq 5\%$ $U_{\text{Nominal}}$
Load regulation CC	$\leq 0.1\%$ FS (0 - 100% load, constant output voltage and constant temperature)
Line regulation CC	$\leq 0.01\%$ FS (208 V - 480 V AC $\pm 10\%$ supply voltage, constant load and constant temperature)
Stability CC	$\leq 0.02\%$ FS (during 8 h of operation, after 30 minutes warm-up, at constant output voltage, load and temperature)
Temperature coefficient CC	$\leq 50$ ppm/ $^{\circ}$ C (after 30 minutes of warm-up)
Load regulation CP	$\leq 0.3\%$ FS (0 - 100% load, constant output voltage and constant temperature)
Load regulation CR	$\leq 0.3\%$ FS + 0.1% FS current (0 - 100% load, constant output voltage and constant temperature)
<b>Protective functions</b>	
OVP	Overvoltage protection, adjustable 0 - 110% $U_{\text{Nominal}}$
OCP	Overcurrent protection, adjustable 0 - 110% $I_{\text{Nominal}}$
OPP	Overpower protection, adjustable 0 - 110% $P_{\text{Nominal}}$
OT	Overtemperature protection (DC output shuts down in case of insufficient cooling)
<b>DC output dynamic</b>	
Rise time 10 - 90% CV	$\leq 10$ ms
Fall time 90 - 10% CV	$\leq 10$ ms
Rise time 10 - 90% CC	$\leq 2$ ms
Fall time 90 - 10% CC	$\leq 2$ ms
<b>Display accuracy</b>	
Voltage	$\leq 0.05\%$ FS
Current	$\leq 0.1\%$ FS
<b>Insulation</b>	
AC input to DC output	3750 Vrms (1 minute, creepage distance >8 mm) *1
AC input to case (PE)	2500 Vrms
DC output to case (PE)	Depending on the model, see model tables
DC output to interfaces	1000 V DC (models up to 360 V rating), 1500 V DC (models from 500 V rating)
<b>Interfaces digital</b>	
Built-in, galvanically isolated	USB, Ethernet (100 MBit) for communication, 1x USB Host for data acquisition
Optional, galvanically isolated	CAN, CANopen, RS232, ModBus TCP, Profinet, Profibus, EtherCAT, Ethernet
<b>Interfaces analog</b>	
Built-in, galvanically isolated	15 pole D-Sub
Signal range	0 - 10 V or 0 - 5 V (switchable)
Inputs	U, I, P, R, remote control on/off, DC output on/off, resistance mode on/off
Outputs	Monitor U and I, alarms, reference voltage, DC output status, CV/CC regulation mode
Accuracy U / I / P / R	0 - 10 V: $\leq 0.2\%$ , 0 - 5 V: $\leq 0.4\%$

\*1 Models up to 80 V DC rating have reinforced insulation while all other models from 200 V DC rating have basic insulation

<b>General specifications</b>	
<b>Device configuration</b>	
Parallel operation	Up to 64 units of any power class in series 10000, with master-slave bus and Share bus
<b>Safety and EMC</b>	
Safety	EN 61010-1 IEC 61010-1 UL 61010-1 CSA C22.2 No 61010-1 BS EN 61010-1
EMC	EN 55011, class B CISPR 11, class B FCC 47 CFR part 15B, unintentional radiator, class B EN 61326-1 include tests according to: - EN 61000-4-2 - EN 61000-4-3 - EN 61000-4-4 - EN 61000-4-5 - EN 61000-4-6
Safety protection class	1
Ingress Protection	IP20
<b>Environmental conditions</b>	
Operating temperature	0 - 50 °C (32 - 122 °F)
Storage temperature	-20 - 70 °C (-4 - 158 °F)
Humidity	≤80% relative humidity, non-condensing
Altitude	≤2000 m (≤6,600 ft)
Pollution degree	2
<b>Mechanical construction</b>	
Cooling	Forced air flow from front to rear (temperature controlled fans), optional water cooling
Dimensions (W x H x D)	Enclosure: 19" x 4U x 668 mm (26.3 in) Total: 19" x 4U x min. 785 mm (31 in)
Weight	50 kg (110 lb)
Weight with water cooling	56 kg (126 lb)

Technical specifications	PS 10060-1000	PS 10080-1000	PS 10200-420	PS 10360-240
<b>DC output</b>				
Voltage range	0 - 60 V	0 - 80 V	0 - 200 V	0 - 360 V
Ripple in CV (rms)	≤25 mV (BW 300 kHz)	≤25 mV (BW 300 kHz)	≤40 mV (BW 300 kHz)	≤55 mV (BW 300 kHz)
Ripple in CV (pp)	≤320 mV (BW 20 MHz)	≤320 mV (BW 20 MHz)	≤300 mV (BW 20 MHz)	≤320 mV (BW 20 MHz)
Current range	0 - 1000 A	0 - 1000 A	0 - 420 A	0 - 240 A
Power range	0 - 30000 W	0 - 30000 W	0 - 30000 W	0 - 30000 W
Resistance range	0.003 Ω - 5 Ω	0.003 Ω - 5 Ω	0.0165 Ω - 25 Ω	0.05 Ω - 90 Ω
Output capacitance	25380 μF	25380 μF	5400 μF	1800 μF
Efficiency (up to)	95.1% *1	95.5% *1	95.3% *1	95.8% *1
<b>Insulation</b>				
Negative DC pole <-> PE	±600 V DC	±600 V DC	±1000 V DC	±1000 V DC
Positive DC pole <-> PE	+600 V DC	+600 V DC	+1000 V DC	+1000 V DC
<b>Article numbers</b>				
Standard	06230900	06230901	06230902	06230903
Standard + Water Cooling	06250900	06250901	06250902	06250903

\*1 At 100% power and 100% output voltage

Technical specifications	PS 10500-180	PS 10750-120	PS 10920-125	PS 11000-80
<b>DC output</b>				
Voltage range	0 - 500 V	0 - 750 V	0 - 920 V	0 - 1000 V
Ripple in CV (rms)	≤70 mV (BW 300 kHz)	≤200 mV (BW 300 kHz)	≤200 mV (BW 300 kHz)	≤300 mV (BW 300 kHz)
Ripple in CV (pp)	≤350 mV (BW 20 MHz)	≤800 mV (BW 20 MHz)	≤800 mV (BW 20 MHz)	≤1600 mV (BW 20 MHz)
Current range	0 - 180 A	0 - 120 A	0 - 125 A	0 - 80 A
Power range	0 - 30000 W	0 - 30000 W	0 - 30000 W	0 - 30000 W
Resistance range	0.08 Ω - 170 Ω	0.2 Ω - 370 Ω	0.25 Ω - 550 Ω	0.4 Ω - 650 Ω
Output capacitance	675 μF	450 μF	100 μF	200 μF
Efficiency (up to)	96.5% *1	96.5% *1	96.5% *1	95.8% *1
<b>Insulation</b>				
Negative DC pole <-> PE	±1500 V DC	±1500 V DC	±1500 V DC	±1500 V DC
Positive DC pole <-> PE	+2000 V DC	+2000 V DC	+2000 V DC	+2000 V DC
<b>Article numbers</b>				
Standard	06230904	06230905	06230909	06230906
Standard + Water Cooling	06250904	06250905	06250909	06250906

\*1 At 100% power and 100% output voltage

Technical specifications	PS 11500-60	PS 12000-40		
<b>DC output</b>				
Voltage range	0 - 1500 V	0 - 2000 V		
Ripple in CV (rms)	≤400 mV (BW 300 kHz)	≤400 mV (BW 300 kHz)		
Ripple in CV (pp)	≤2400 mV (BW 20 MHz)	≤2400 mV (BW 20 MHz)		
Current range	0 - 60 A	0 - 40 A		
Power range	0 - 30000 W	0 - 30000 W		
Resistance range	0.8 Ω - 1500 Ω	1.7 Ω - 2700 Ω		
Output capacitance	75 μF	50 μF		
Efficiency (up to)	96.5% *1	96.5% *1		
<b>Insulation</b>				
Negative DC pole <-> PE	±1500 V DC	±1500 V DC		
Positive DC pole <-> PE	+2000 V DC	+2000 V DC		
<b>Article numbers</b>				
Standard	06230907	06230908		
Standard + Water Cooling	06250907	06250908		

\*1 At 100% power and 100% output voltage

## General

The DC laboratory power supplies in the PS 10000 series from EA Elektro-Automatik convert the energy from the grid into a regulated DC voltage with an efficiency of up to 96%. The PS 10000 series includes single and three phase units, which, together with the wide input range, allows use with practically all global mains voltages. The DC voltage and current are directed by the application and the spectrum ranges from 0 - 60 V to 0 - 2000 V and from 0 - 6 A up to 0 - 1000 A in a single device. The DC supply operates as a flexible output stage with a constant power characteristic (autoranging), and a wide voltage, current and power range. To achieve higher power and current all units are equipped with a master-slave bus. This enables up to 64 parallel connected devices to be combined into one system which can provide up to 1920 kW and 64000 A. Such a system works as a single unit and can use different power classes, only the voltage class must remain constant. In this way a user can construct a 75 kW system from two 30 kW 4U and one 15 kW 3U device from the PS or PSI 10000 range. Furthermore, typical laboratory functionality is provided. This includes an alarm management, various optional industrial interfaces, software solutions and many more functions.

## AC connection


The DC power supplies in the PS 10000 series are equipped with an active PFC which provides a high efficiency at a low energy consumption. Furthermore, the devices in this series provide a wide input voltage range. It reaches from 110/120 V up to 240 V with 1-phase models and from 208 V to 380/400/480 V with 3-phase models. Hence the devices can be operated in the majority of global grids. They adjust automatically, without additional configuration, to the available grid voltage. In a 110/120 V and 208 V AC grid a derating of the DC output power is automatically set.

## DC output

The DC output of the power supplies in series PS 10000 4U is rated for DC voltages of 0 - 60 V up to 0 - 2000 V, allowing currents of 0 - 40 A up to 0 - 1000 A. The flexible output stages (autoranging) provide the user with a wide voltage, current and power range and hence a wider field of working than traditional power supplies.

## DC connection

Connection of the DC output is done via copper blades on the back side of the device. If a system with higher performance is required, the devices are simply connected in parallel. With minimal effort devices can be linked with the vertical copper rails. A cover for contact protection is provided.

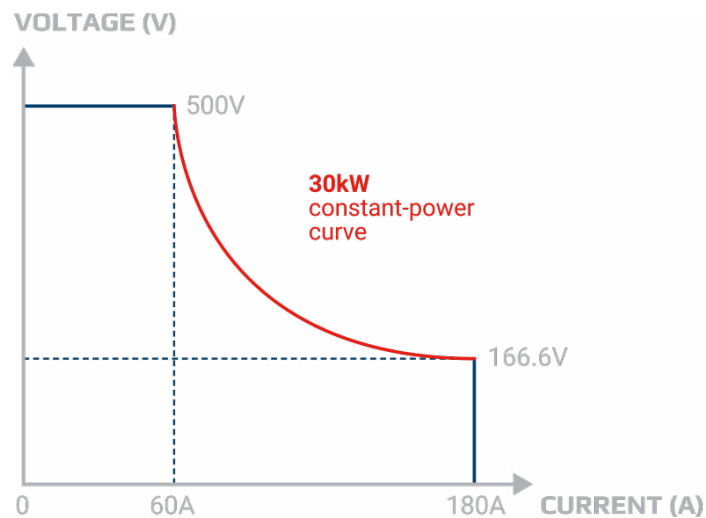

## The principle of autoranging

„Autoranging“ is a term used when a programmable DC power supply automatically offers a wider output range of both, voltage and current, to maintain full power across a wide operation range. This type of solution allows the use of a single unit to address multiple voltage and current combinations.

## Interfaces

As standard, 10000s series devices are fitted with the most important interfaces and ports which are all galvanically isolated from the DC input. There is an analog interface which can be parameterized for input and output, control and monitoring, of 0 - 5 V or 0 - 10 V for voltage, current, power and resistance, assorted inputs and outputs as well as USB and Ethernet ports. Further optional industrial interface for plug & play slot complete the portfolio:

- CAN
- CANopen
- RS232
- Profibus
- EtherCAT
- Profinet, with one or two ports
- Modbus, with one or two ports
- Ethernet, with one or two ports



## High performance systems

High power applications can be covered with high power systems of up to 1920 kW. This is achieved by connecting the DC terminals of multiple PS 10000 4U devices with vertical copper rails in parallel. Thus, a 19" cabinet with 42 U can provide a system with 240 kW occupying only 0.6 m<sup>2</sup> (6.5 sqft) of floor space. The master-slave bus allows for up to 8 cabinets with a maximum of 64 units with 30 kW each to behave as one unit.

## Master-slave bus and Share bus

When the integrated master-slave bus and Share bus are used, a multi device system behaves as a single device. The buses are simply connected between each device. With the master-slave bus the system data, such as total power and total current, are collected and displayed on the master unit. Warnings and alarms of the slave devices are also clearly displayed. The Share bus cares for a balanced load distribution between the individual units.



## Example representation

In this illustration you can see a fully assembled and wired 240 kW system

## Applications




### Relay test in the production

Relay manufacturers must carry out assorted tests on their products during production. For these the coils and contacts are provided with exactly defined voltage and current. For the coil tests, important parameters such as operating, holding and decay current, together with the associated voltages must be checked and documented. For the contacts, not only are the current carrying capability and contact resistance important parameters, but also voltage consistency and disconnect threshold indicate much about the product quality. Testing all these is best supported by an automatic test system. A part of such a system can be the devices of the PS 10000 series with their exact, dynamic, controls of voltage, current, power, and resistance, providing optimal values for the best test results. With their diverse interface connections, they can be integrated into any test system and deliver the necessary data without the need for additional measuring equipment.


### On-board charger test

In an on-board charger test (OBC) the electrical features of the charger must be tested under various conditions. This requires a flexible test system which also provides test data. With the sequencing and logging functions of the software EA-Power Control it allows data to be exported and saved. In this way applications can instantly generate reproducible test results based on dynamic and highly accurate set point and measurement data. To avoid competition between two separate control loops of the device under test (DUT) and the testing device, the voltage regulation speed of the power supply is adjustable. The modes Normal, Fast and Slow allow the PS 10000 devices to be adapted the control characteristics of the on-board charger. Due to the fact that a power supply can only operate as a source, the combination with a sink, here an electronic DC load of ELR 10000 series, might be required.

# Technical drawings PS 10000 4U $\leq 200$ V

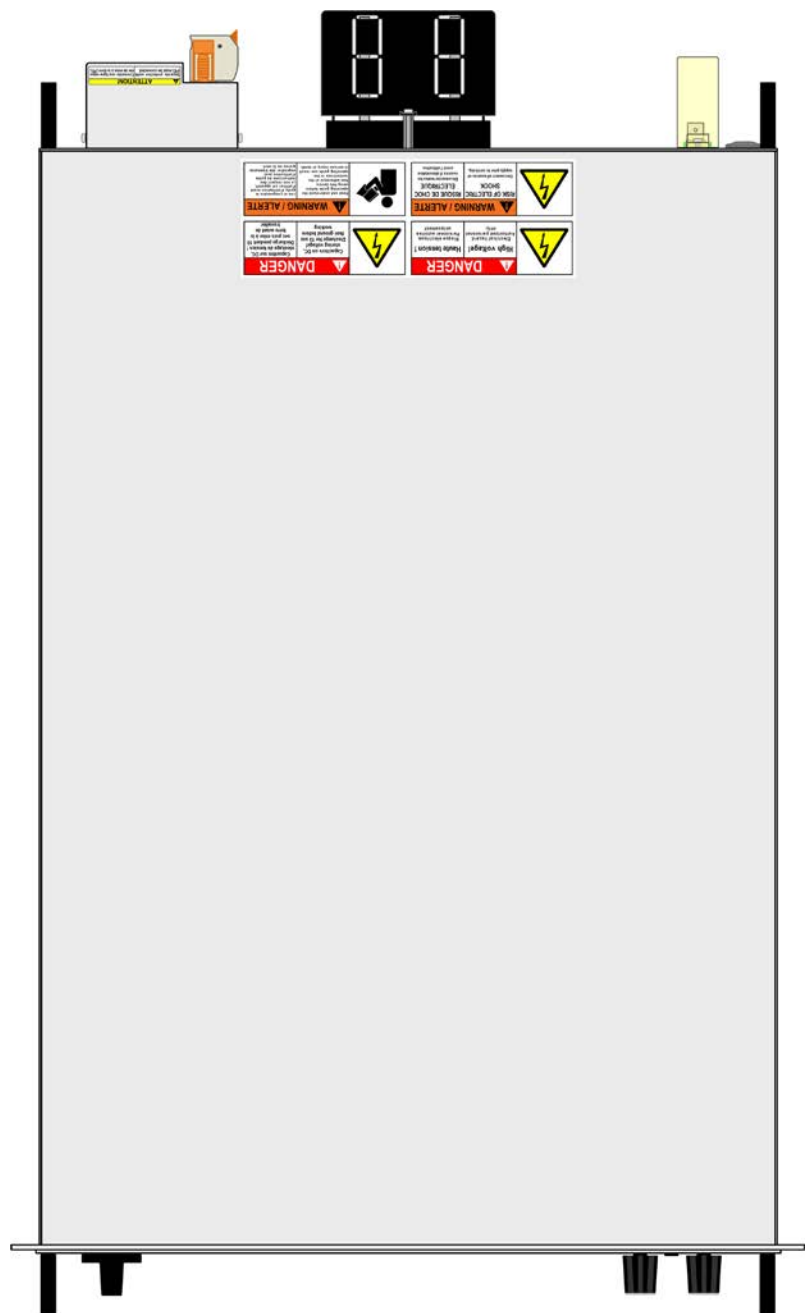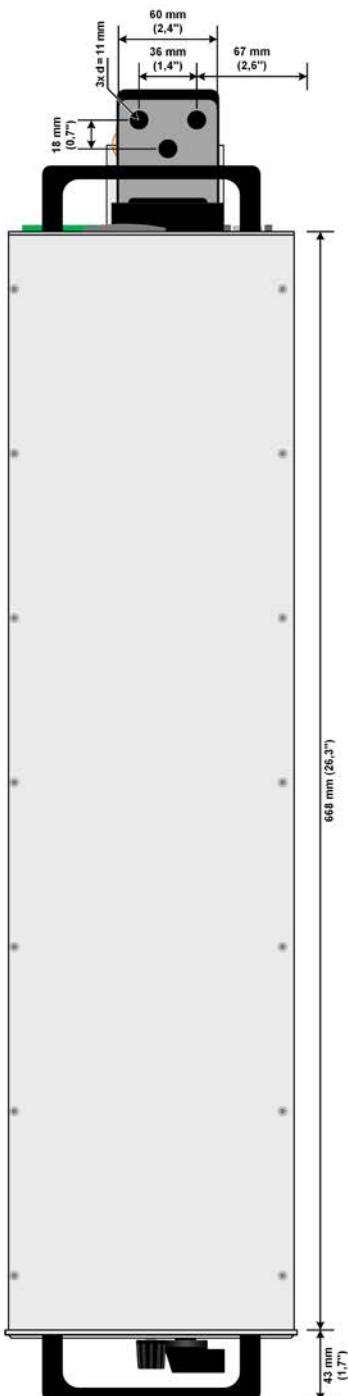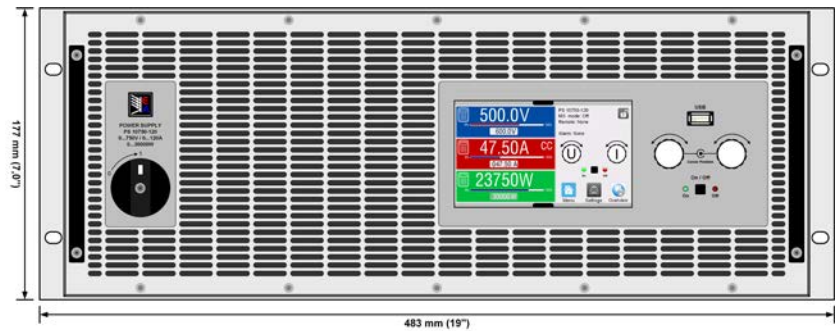


## Front panel description PS 10000 4U

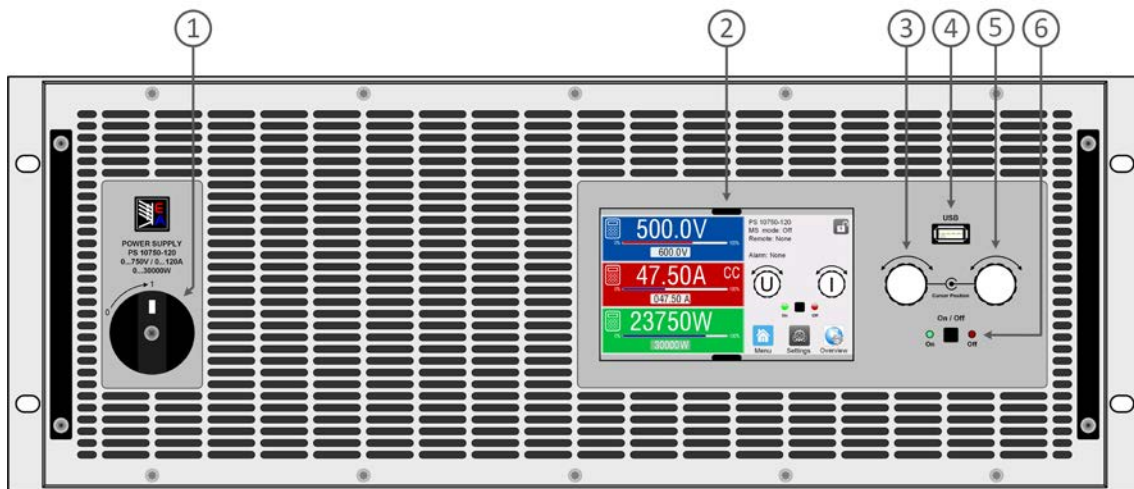




1. Power switch
2. TFT control interface, interactive operation and display
3. Rotary knob with push-button action, for settings and control
4. USB host, uses USB sticks for data logging and sequencing
5. Rotary knob with push-button action, for settings and control
6. On / Off push-button with LED status display

## Rear panel description PS 10000 4U $\leq 200\text{ V}$

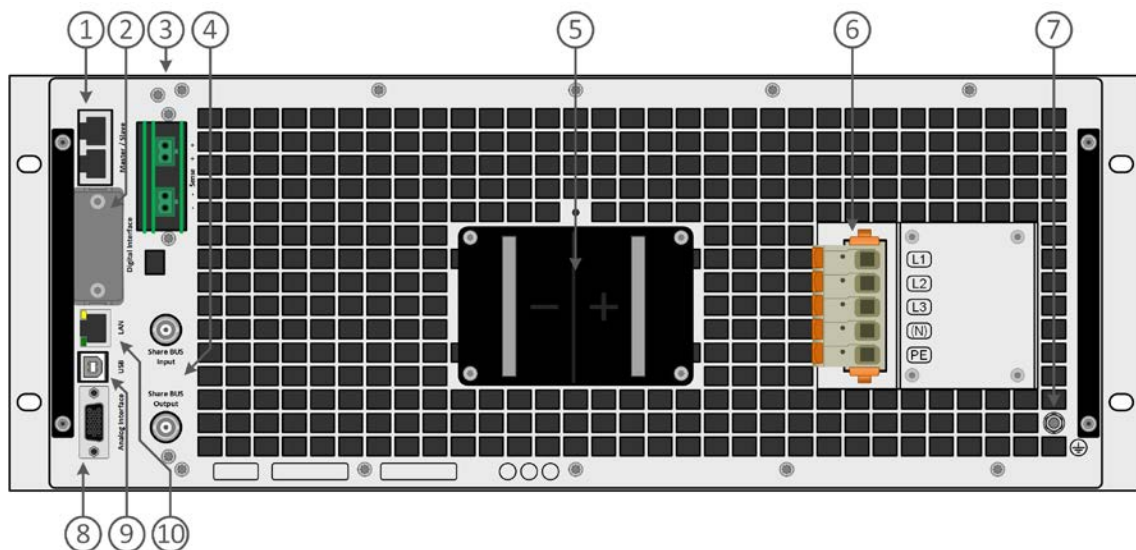


1. Master-Slave bus connectors to set up a system for parallel connection
2. Slot for interfaces
3. Remote sense connectors
4. Share bus connectors to set up a system for parallel connection
5. DC output terminal (copper blades)
6. AC input connector
7. Grounding connection screw (PE)
8. Connector (DB15 female) for isolated analog programming, monitoring and other functions
9. USB interface
10. Ethernet interface

# Technical drawings PS 10000 4U $\geq 360$ V

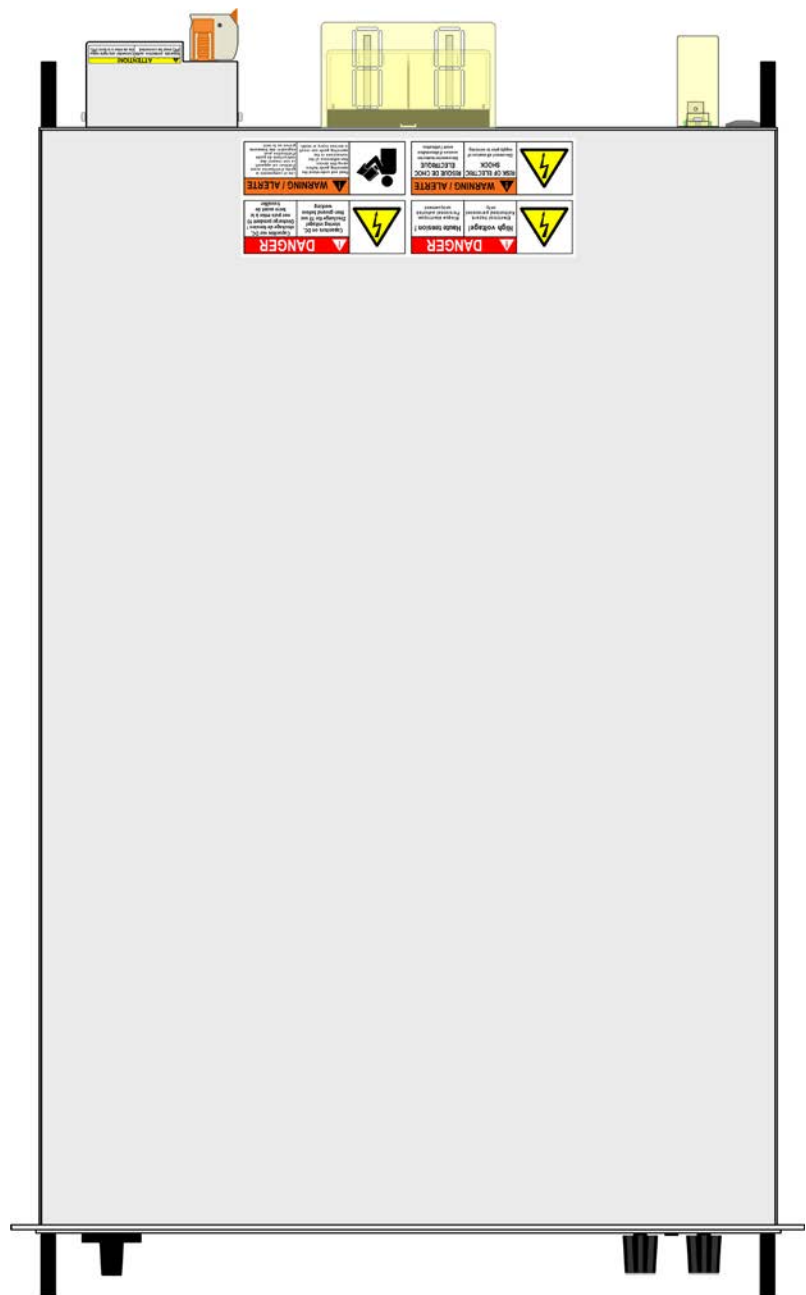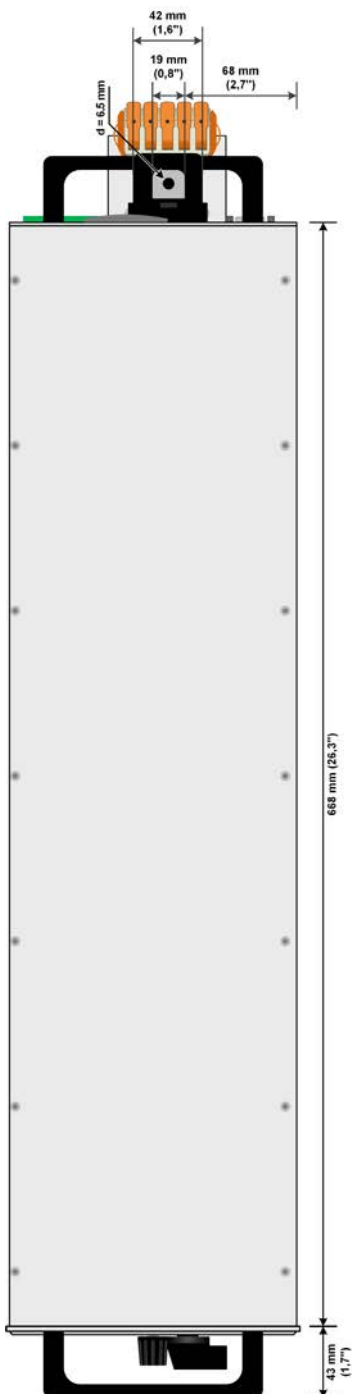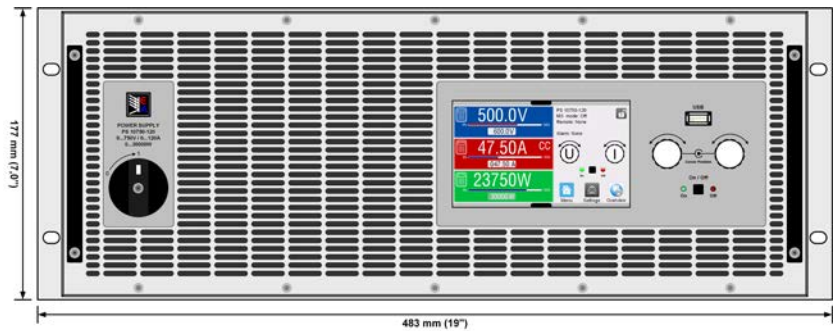


## Front panel description PS 10000 4U

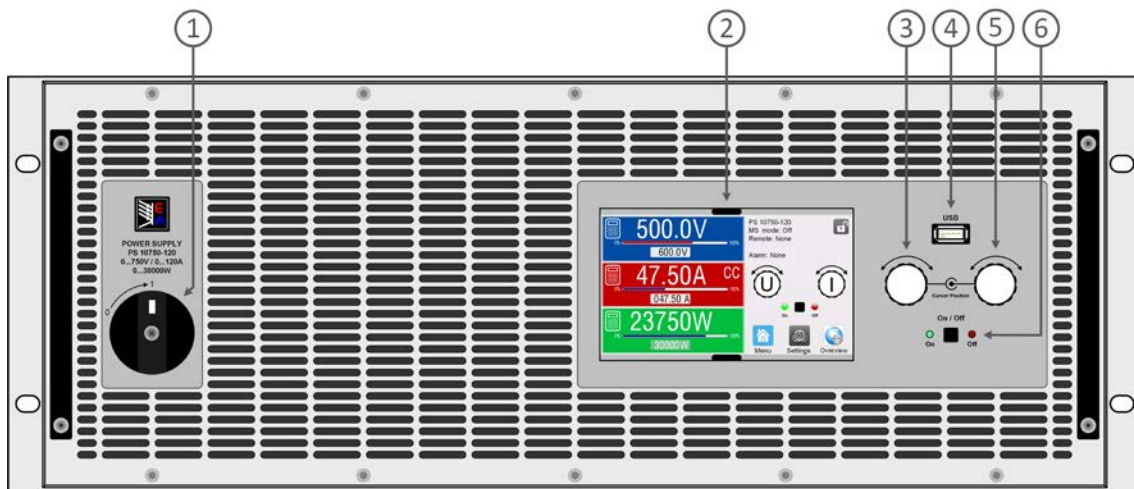

1. Power switch
2. TFT control interface, interactive operation and display
3. Rotary knob with push-button action, for settings and control
4. USB host, uses USB sticks for data logging and sequencing
5. Rotary knob with push-button action, for settings and control
6. On / Off push-button with LED status display


## Rear panel description PS 10000 4U $\geq 360$ V

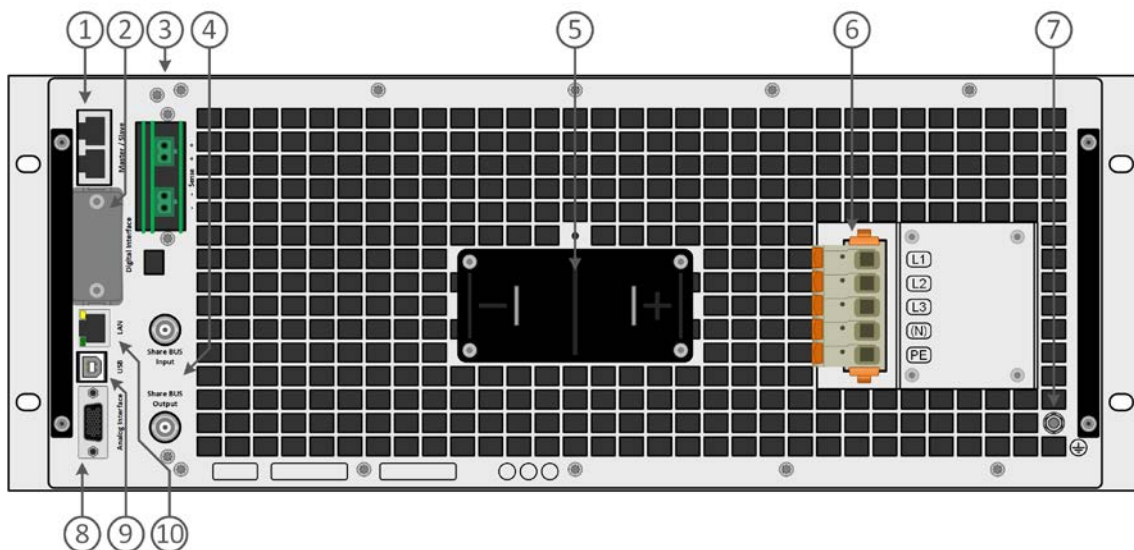

1. Master-Slave bus connectors to set up a system for parallel connection
2. Slot for interfaces
3. Remote sense connectors
4. Share bus connectors to set up a system for parallel connection
5. DC output terminal (copper blades)
6. AC input connector
7. Grounding connection screw (PE)
8. Connector (DB15 female) for isolated analog programming, monitoring and other functions
9. USB interface
10. Ethernet interface




## Front panel description PS 10000 4U with Water Cooling option

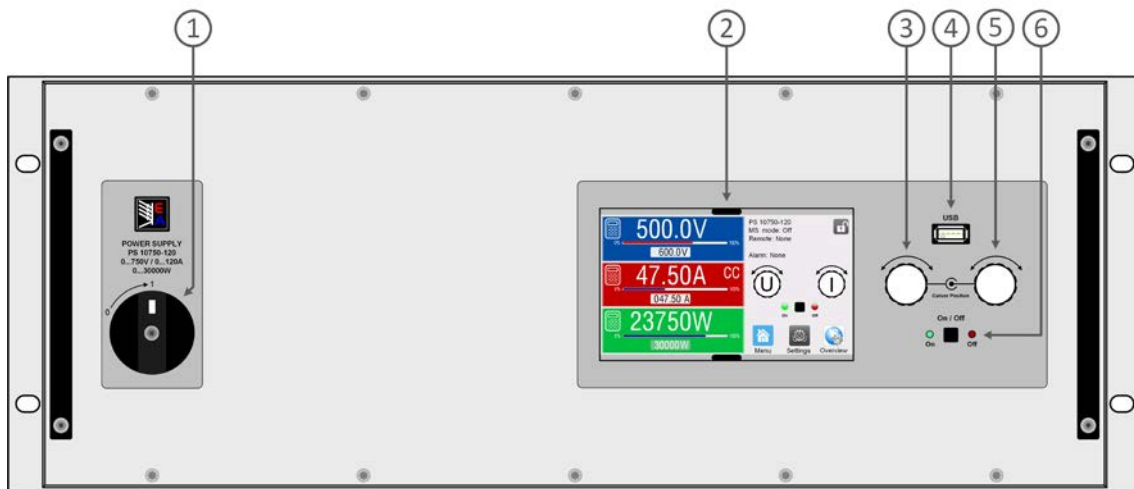

1. Power switch
2. TFT control interface, interactive operation and display
3. Rotary knob with push-button action, for settings and control
4. USB host, uses USB sticks for data logging and sequencing
5. Rotary knob with push-button action, for settings and control
6. On / Off push-button with LED status display

## Rear panel description PS 10000 4U with Water Cooling option

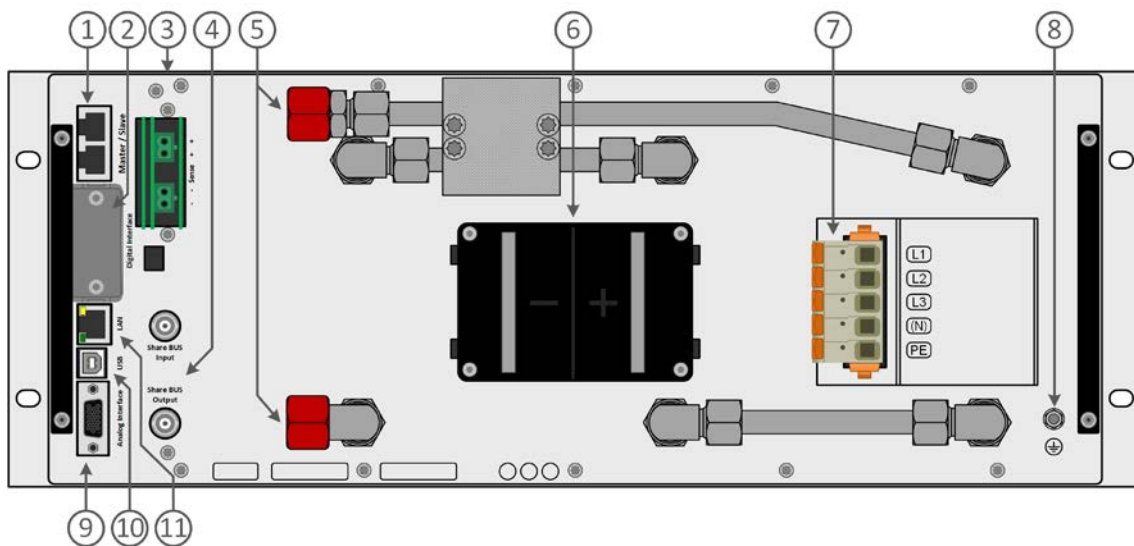

1. Master-Slave bus connectors to set up a system for parallel connection
2. Slot for interfaces
3. Remote sense connectors
4. Share bus connectors to set up a system for parallel connection
5. Inlets and outlets for water-cooling
6. DC output terminal (copper blades)
7. AC input connector
8. Grounding connection screw (PE)
9. Connector (DB15 female) for isolated analog programming, monitoring and other functions
10. USB interface
11. Ethernet interface

**EA Elektro-Automatik GmbH & Co. KG**

Helmholtzstr. 31-37  
41747 Viersen

Phone +49 2162 3785 - 0  
Fax +49 2162 1623 - 0  
ea1974@elektroautomatik.com

**[www.elektroautomatik.com](http://www.elektroautomatik.com)**

**EA Elektro-Automatik Inc.**

7926 Convoy Court  
CA, 92111, San Diego

Phone +1 (858) 836 1300  
sales@elektroautomatik.com

**[www.eapowered.com](http://www.eapowered.com)**

